
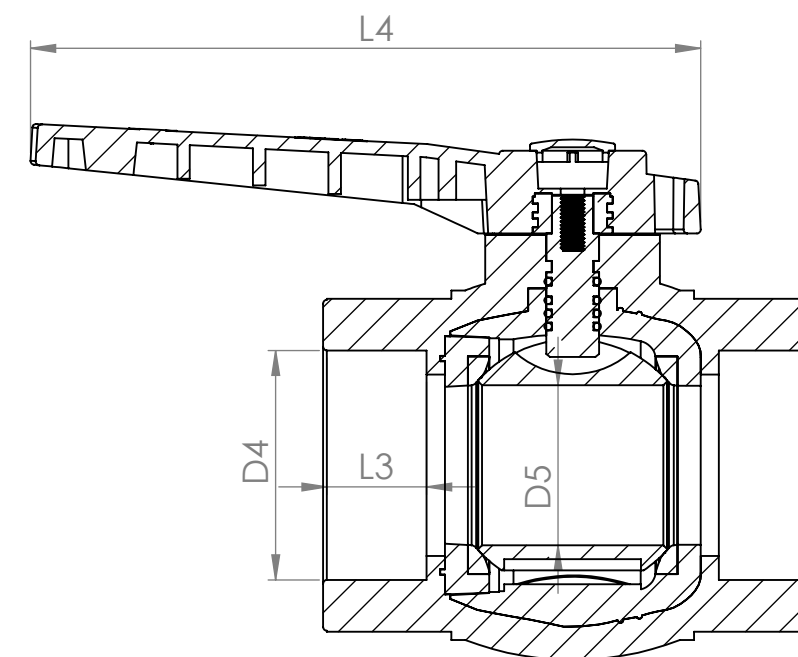
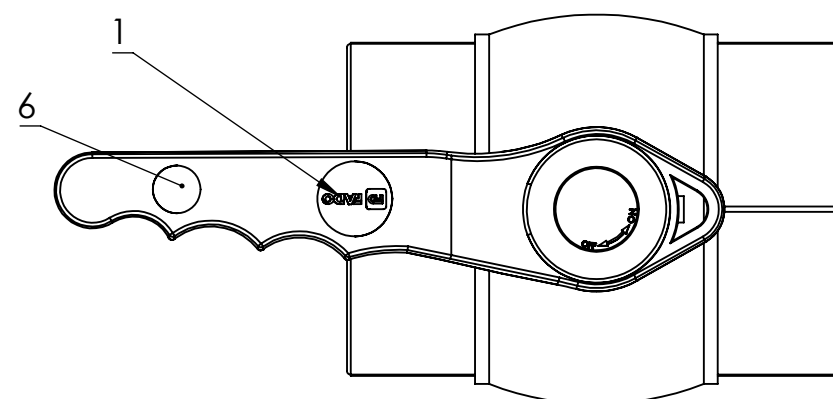
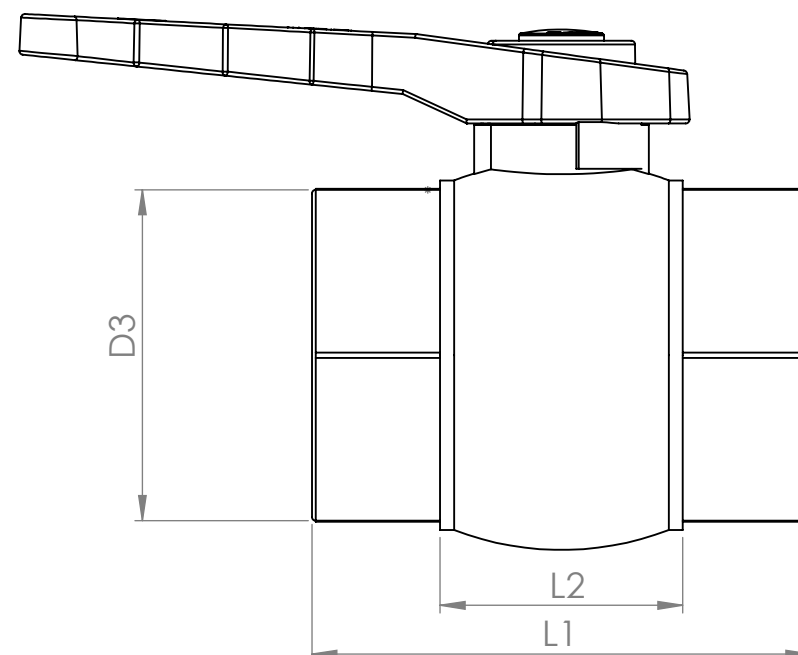


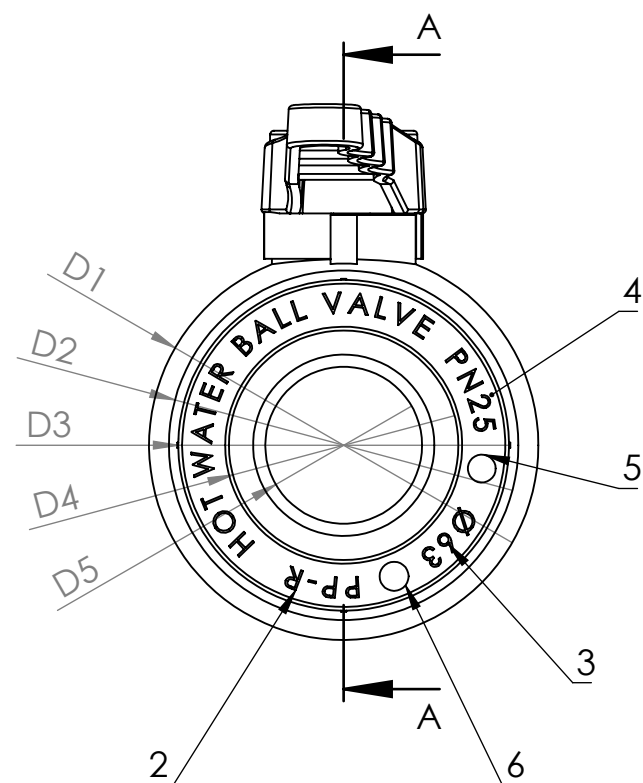

SECTION A-A

Marking on plastic body :

1. FADO logo
2. Material type: PP-R
3. Size:
4. Pressure :PN25
5. Cavity number
6. Date of production

Forbidden any scratches, burrs, shrinkage,
injection gate on surface.

Forbidden any air cavity in plastic volume.

Max working pressure 25Bar

Max working temperature +95°C .

To be conform according EN13828

	D1	D2	D3	D4	D5	L1	L2	L3	L4	Weight full	Size
PKG01	41.2	35.6	30.2	19.2	15	68.7	38.13	16.3	94.85	119.3	20
PKG02	47.48	41.53	35.8	24.1	17.2	74.5	42.77	18.2	94.85	167.7	25
PKG03	58.72	50.62	45.6	31	22.3	85.9	51	20.4	140	276.4	32
PKG04	72.93	61.05	55.6	38.9	29	104	60.37	21.8	140	430	40
PKG05	86.28	75.3	68.6	49.3	38.1	114.83	64.5	23.6	177.3	783	50
PKG06	103	92.45	87.5	60.7	41.5	132	64.2	26.35	177.3	1188.2	63

					PKG0_GEN HOT WATER BALL VALVE FADO									
					PKG0_GEN					Лит.		Масса	Масштаб	
Изм.	Лист	№ докум.	Подп.	Дата										
Разраб.														
Пров.														
Т. контр.										Лист		Листов		
										 FADO				
Н. контр.														
Утв.														